




FEATURES

- Highly Polished Aluminum Tubing
- 1.9" OD 6061-T6 Aluminum Tube Schd #40
- 0.145" Wall Thickness
- 1.05" OD Aluminum Bracing
- Ready To Accept Pre-Wired Lamp Bar
- Lamp Bar Drops Fixtures Through Bottom For Full Focus Ability
- Fabricated By Certified Welders
- Custom Lengths & Corners Available
- Available With Steel Spigots
- Powder Coating Available

This plated pre-rigged truss is designed to accommodate a lamp bar fitted with standard ellipsoidal fixtures. The main chords are 1.9" OD 6061-T6 schedule 40 aluminum with 1.05" OD bracing and 5/8" grade 8 bolts are included for assembly of the truss elements. Lamp bars and casters can be supplied as optional items.

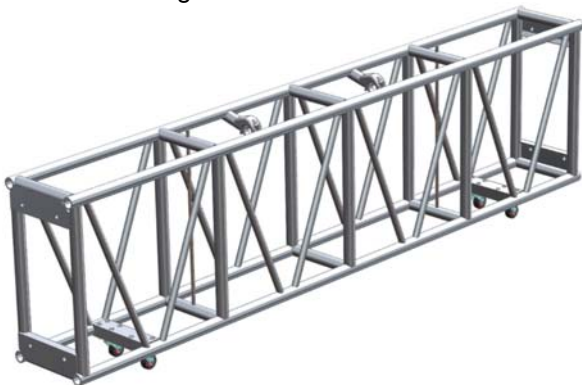

PLATED ALLOWABLE LOAD DATA

SPAN (ft.)	UNIFORMLY DISTRIBUTED LOAD			CENTER POINT LOAD	
	LOAD (#/ft.)	LOAD (#)	MAX. DEFL. (in.)	LOAD (#)	MAX. DEFL. (in.)
10	710	7100	.025	7141	.040
20	350	7000	.198	4868	.220
30	211	6330	.605	3176	.484
40	115	4600	1.042	2309	.833
50	70	3500	1.562	1772	1.250


Connection: 5/8" Dia. x 2" Grade 8 Bolts

Weight Load Certified By Structural Engineer ****SINGLE USE****


ORDERING INFORMATION

Item No.	Dimensions	Weight
12-01-120	15" x 30" x 120"	113 lbs.
12-01-093	15" x 30" x 93"	67 lbs.
12-01-004	4-Way Corner	40 lbs.
12-05-004	Casters/Set of 4	8 lbs.


LAMP BARS AND CASTERS SOLD SEPARATELY
See Page 22 For Lampbar Information

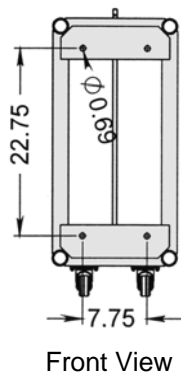

Standard Corner



Top View

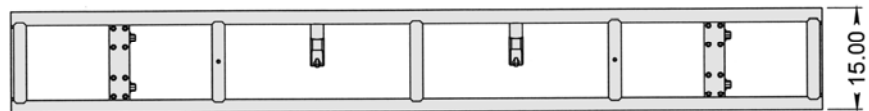

Side View

